
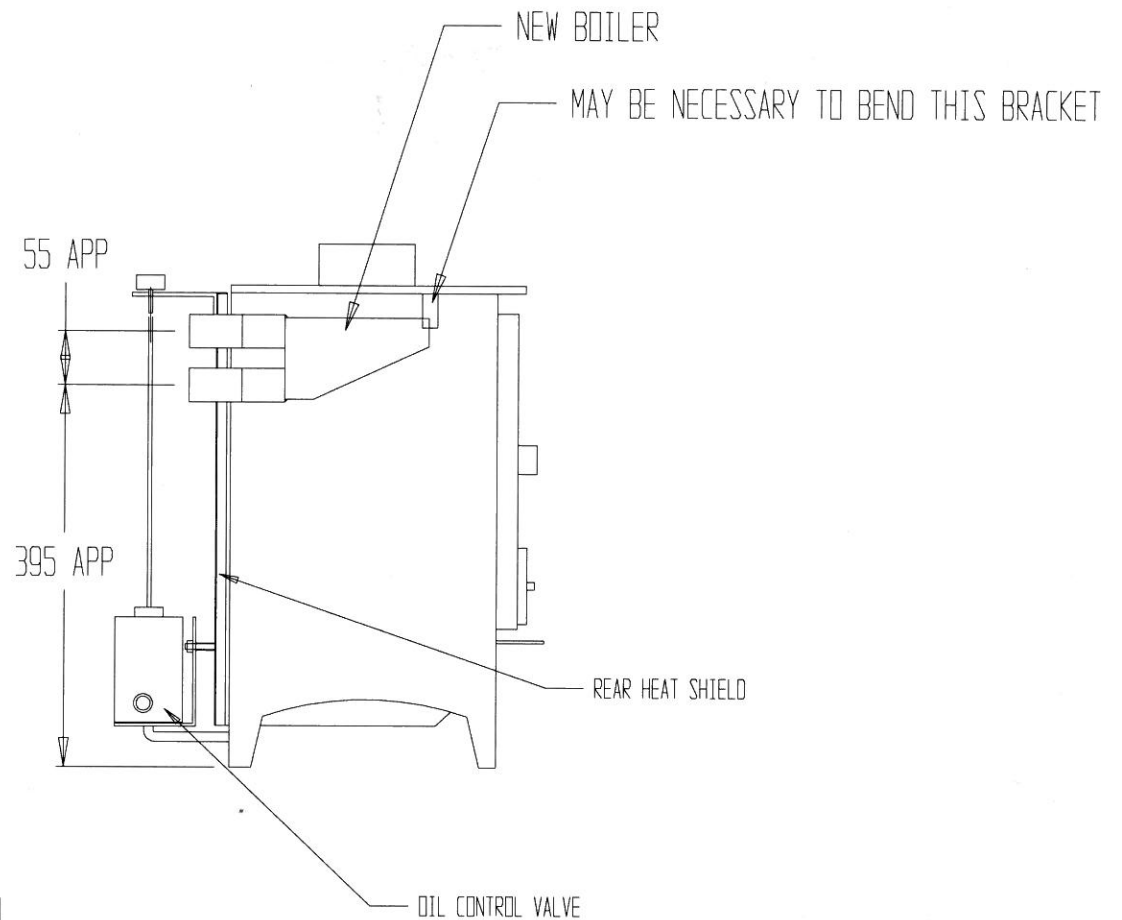
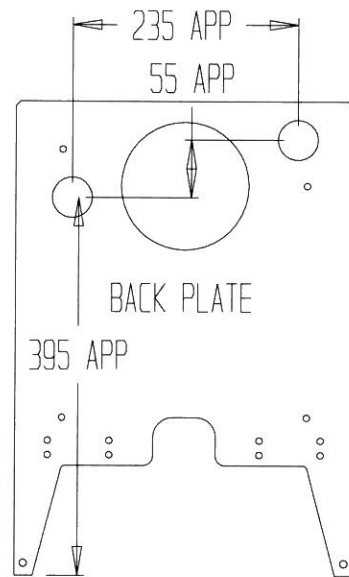


SMALL BOILER FITTING

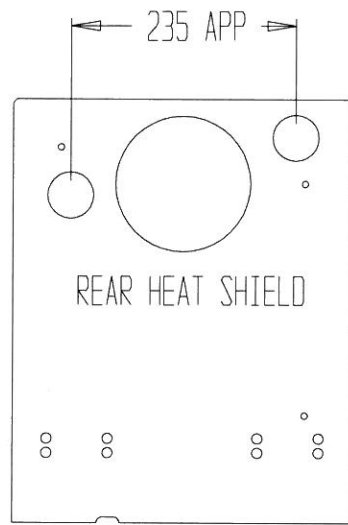

1. REMOVE THE BAFFLE PLATE.
2. REMOVE THE OIL CONTROL VALVE.
3. REMOVE THE OIL CONTROL VALVE BRACKET MARK THE POSITION AND MAKE SURE THAT IT GOES BACK IN THE SAME POSITION.
4. REMOVE THE REAR HEAT SHIELD.
5. MARK OUT THE STOVE BACK PLATE AND HOLE SAW 40MM DIA.
6. CHECK THAT THE BOILER FITS THROUGH THE HOLES.
7. IF IT DOES, REFIT THE REAR HEAT SHIELD AND MARK OUT THROUGH THE 40MM HOLES TO ENSURE ALIGNMENT.
8. FIT THE BOILER AND TIGHTEN THE BACK NUTS USING FIRECLAY AS A JOINT SEALER.
9. REBUILD THE STOVE.

NOTE

1. IT MAY BE NECESSARY, USING A HAMMER, TO BEND THE INTERNAL BAFFLE SUPPORT OUT OF THE WAY TO LET THE BOILER FIT.
2. THE EXISTING BAFFLE IS NOT REQUIRED WITH THE NEW BOILER