



OIL SUCTION PUMP APPLICATIONS

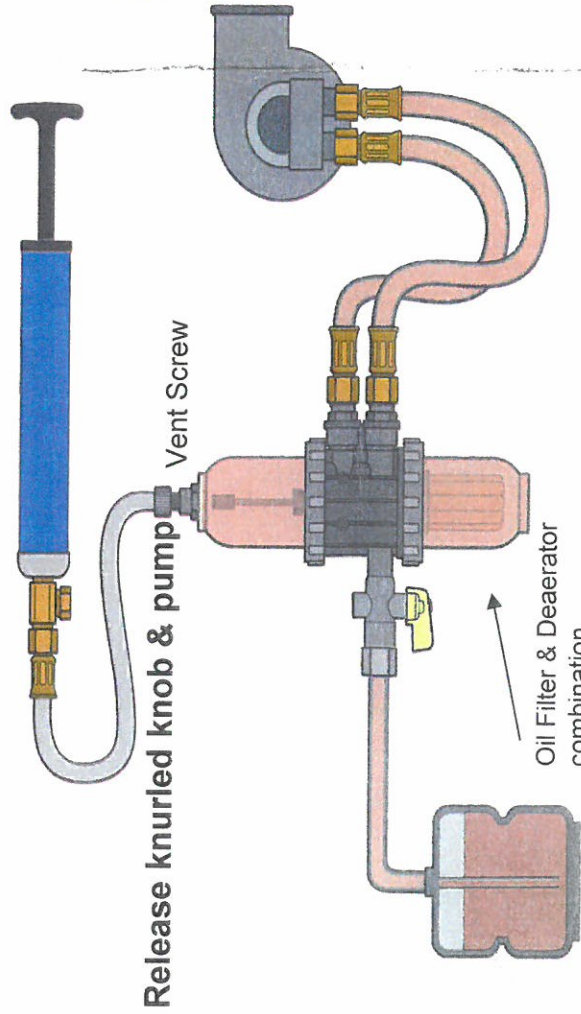

Drawing Oil from a Low Level Tank to a GS Pro FI3 Indoor/Outdoor Model Deaerator


OIL SUCTION PUMP

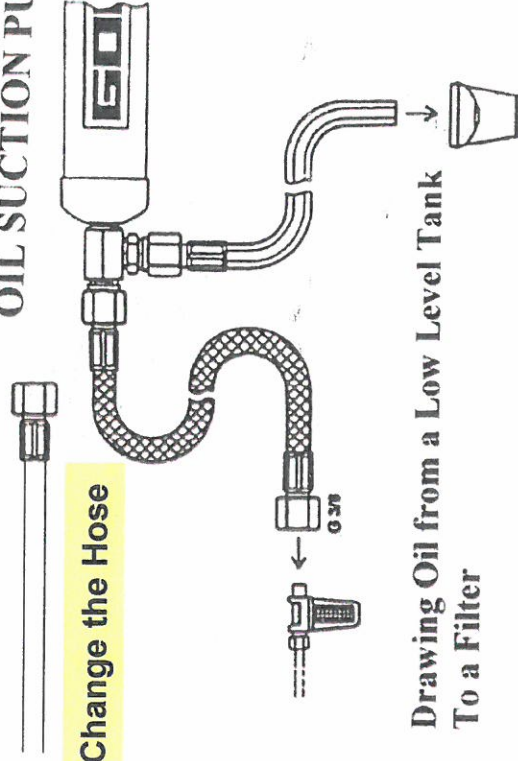

Capacity per stroke (double acting)
400 milli litres

Maximum Suction -0.8 Bar

OIL SUCTION PUMP

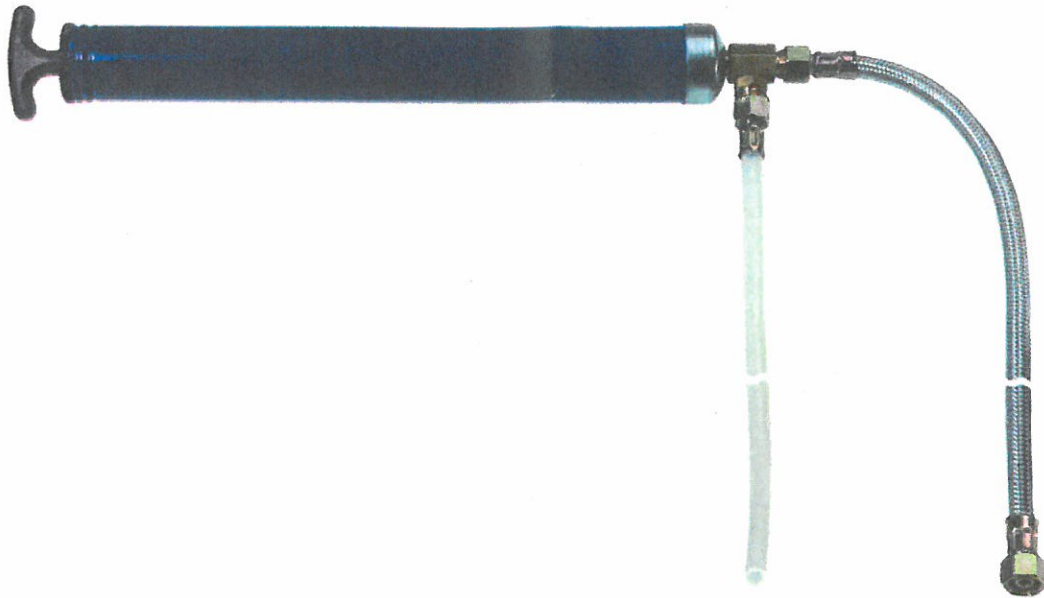

The OIL SUCTION PUMP available from Anglo Nordic is an essential tool for all Oil Engineers whether installing new systems or modifying old systems where the systems are not self priming.

As more and more systems are now using Top Entry tanks the use of de-aerators and oil lifters has become more widespread resulting in a greater requirement for OIL SUCTION PUMPS.

The unit is a reciprocating suction pump. Each Pump is supplied with a suction hose for connecting to the GS Pro Fi3 De-Aerator (see overleaf) or an oil filter and also with a discharge flexible hose for draining the excess oil into a collecting basin.

General usage instructions are shown overleaf but for more information, prices or details of stockists in your area, please contact our Sales Office.

NOTE: Before use the fuel should be checked for water content as this may cause damage to the internal parts of the pump and invalidate any warranty.