

Jøtul Gas Atra 740 DS

Jøtul Gas Atra 740 DS Log Layout and Kit

Installation and Operating Instructions - English	2
Pictures/Pictures	3



These instructions must be kept for future references.

Kit comprises:

1. 4 x Large Straight Log
2. 4 x Large Forked Logs
3. 4 x Small Diameter Long Logs
4. 4 x Small Diameter Short Logs
5. Bag of grey ceramic embers (350g)

Please keep these instructions for future use!

See pictures on page 3.

Picture 1

- Place two small diameter long logs as shown in the centre of the burner tray. Minimize overhanging of flame ports as this could adversely affect combustion.
- Place embers carefully over burner surface between flame ports and to front of burner tray. Do not allow any to block flame ports by tipping them carelessly as this may adversely affect combustion and flame picture.

Service calls will not be accepted for failure to follow these instructions.

Picture 2

- Place 1 small diameter long log and one large forked log on to the burner at the non-control side of the firebox. Rest them on the edge of the burner tray NOT the log retainer, leaning on to the logs laid previously at the positions shown.

Picture 3

- Next place 2 large straight logs one each side of the firebox as shown. Rest them against the firebox sides and onto the previously laid logs.

Picture 4

- Place a second large forked log as shown resting partly on the log retainer and partly on the previously laid logs. Place a small diameter short log to the right side partly resting on the burner tray under the right side large log and partly resting on the log retainer. That completes the non-control side of the burner.

Picture 5

- Starting at the control side of the burner, now place a small diameter long log and a large forked log as shown. They rest on the edge of the burner NOT the log retainer. The same log layout is now being created at this side of the burner, so gently move any of the logs slightly as required to fit easily together.

Picture 6

- Place two large straight logs as shown resting against the firebox sides and onto the previously placed logs.

Picture 7

- Place a large forked log partly resting on the log retainer and partly on the previously laid logs. Place a small diameter short log on the right side, partly under the large straight log already in place and partly resting on the log retainer.

Picture 8

- Place the two remaining small diameter short logs into the remaining spaces at each side of the log set. Rest them on the burner tray edge and the small diameter logs already laid.

The log set is now ready for testing and commissioning.

Fig.1



Fig.2



Fig.3



Fig.6



Fig.4



Fig.7



Fig.5

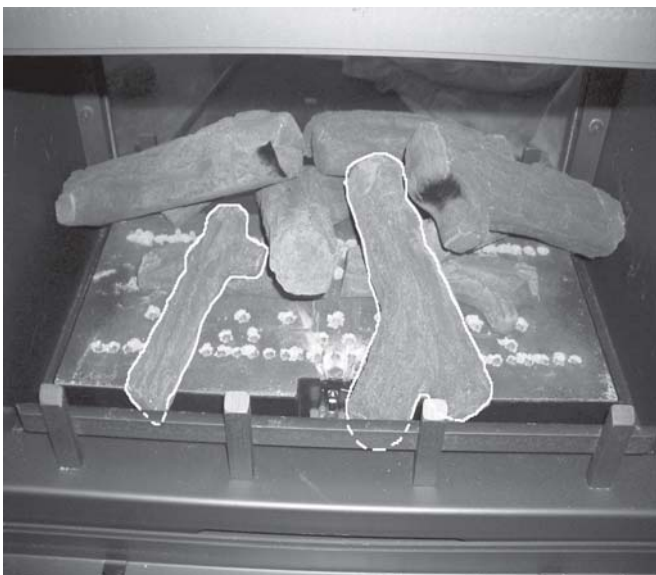


Fig.8



Cat.no.221606
Draw.no.4-4526-P00
Sep 2005

Jøtul pursue a policy of constant product development. Products supplied may therefore differ in specification, colour and type of accessories from those illustrated and described in the brochure.

Quality

Jøtul AS has a quality system that conforms to NS-EN ISO 9001 for product development, manufacturing, and distribution of stoves and fireplaces. This policy gives our customers quality and safety piece of mind as a result of Jøtul's vast experience dating back to when the company first started in 1853.



Jøtul AS,
P.o. box 1411
N-1602 Fredrikstad,
Norway

This product has been controlled by:

_____ Date:

_____ Sign: